



Husky Injection Molding Machine, New 2017 less than 100 hours use in Portland, Tennessee, USA.


Online Auction
Date: September 14th , 2021
 Inspection: by appointment.

Technical Specifications for Husky Injection Molding Machine, Model H800-RS80/65 (Metric Value/Unit):

Clamp : Clamp Force, 8000/Kn. Tiebar Spacing (Horizontal x Vertical), 1320 x 1220/mm. Platen Size (Horizontal x Vertical), 1750 x 1700/mm. Clamp Stroke 1150 – 1850/mm. Shutheight (Min / Max), 500 – 1200/mm. Shutheight with Stack Carrier (Min / Max), 800 – 1200/mm. Daylight 2350/mm. Ejector Stroke 250/mm. Ejector Force, 187/KN. Tiebar Diameter, 215/mm.

Injection: Screw Diameter, 65/mm. Injection Pressure, 2350/bar. Injection Stroke, 350/mm. Injection capacity, 1161/cm3. Barrel Heat Power, 42/Kw. Barrel Control Zones, 5. Accumulator Assit. Injection Rate, 1568/cm3-s. High Speed Accumulator Assit Injection Rate, 3801/cm3-s. Carriage Force, 120/KN. Met Channel Diameter, 22/mm.

Screw Drive: Peripheral Screw Speed (High Torque), .65/m-s. Screw Speed (High Torque Drive), 191/RPM. Screw Torque (High Torque Drive), 2132/Nm.

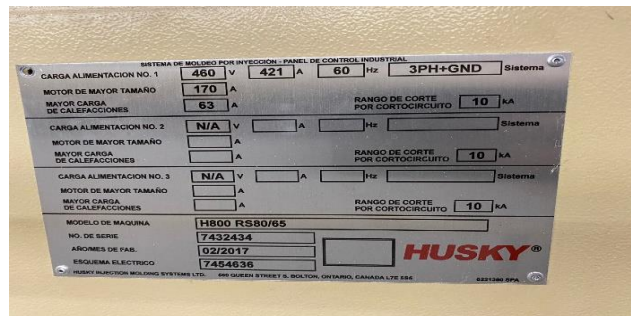

Many more other equipment on this sale coming up, check our website
www.CharlestonAuctions.com

Do you have asset surplus for sale, let us know how could we help.
 Teléfonos: USA 260-373-0850 México 442-245-2305 y 09
mtalamantes@CharlestonServices.com